

BADECEL

BATTERIES

Maintenance Free
Low Maintenance
Batteries Application




Maintenance Free Battery Application Listing

PART NO	JIS / DIN / BCI	AH / 20 HR	RESERVE CAPACITY (MINUTES @ 27 C)	CCA (@ -18 C)	LENGTH (MM)	WIDTH (MM)	HEIGHT (MM)	TOTAL (MM) INCL. HEIGHT POSTS	BOTTOM HOLD-DOWNS	WEIGHT PER UNIT WITH ACID (KG)	TERMINAL TYPE	ASSEMBLY LAYOUT
B55B24R	JIS	45	80	430	239	134	201	224	None	12.80	STD	B
B55D23L	JIS	60	100	500	232	173	205	225	None	15.80	STD	A
B55D23R	JIS	60	100	500	232	173	205	225	None	15.80	STD	B
B55D26L	JIS	60	108	525	260	174	202	225	B1	16.50	STD	A
B55D26R	JIS	60	108	525	260	174	202	225	B1	16.50	STD	B
B56318	DIN	63	105	580	280	175	175	175	B3/B4	16.30	STD	A
B56323	DIN	63	110	580	280	175	175	175	B3	16.30	Ford	A
B56330	DIN	63	110	580	280	175	175	175	B3	16.30	STD	A
B56638	DIN	66	110	580	280	175	190	190	B3	16.80	STD	A
B56639	DIN	66	110	580	280	175	190	190	B3	16.80	Ford	A
B56640	DIN	66	110	580	280	175	190	190	B3	16.80	STD	B
B56820	DIN	68	115	620	280	175	175	175	B3	16.70	STD	A
B56821	DIN	68	115	620	280	175	175	175	B3	16.70	Ford	A
B58515	DIN	85	158	780	353	176	175	190	B3	22.50	STD	A
B586MF	BCI	60	100	530	236	183	157	177	B1	15.00	STD	B
B58827	DIN	88	148	735	353	176	190	190	B3	23.50	STD	A
B58828	DIN	88	148	735	353	176	190	190	B3	23.50	STD	B
B59218	DIN	92	158	810	353	176	190	190	B3	23.50	STD	
B58R6MF	BCI	60	100	530	236	183	157	177	B1	15.00	STD	B
B656MF	BCI	72	128	650	292	189	170	191	B1	18.50	STD	B
B657MF	BCI		138	820	292	189	170	191	B1	18.50	STD	B
B65D31L	JIS	70	136	560	304	173	202	225	None	20.20	STD	A
B65D31R	JIS	70	136	560	304	173	202	225	None	20.20	STD	B
B70D23L	JIS	65	110	580	232	173	205	225	None	16.60	STD	C
B70D23R	JIS	65	110	580	232	173	205	225	None	16.60	STD	D
B755MF	BCI	54	84	550	231	179	185	185	B1	15.50	Side	F
B756MF	BCI	58	97	615	231	179	185	185	B1	15.80	Side	F
B75D31L	JIS	75	150	660	304	173	202	225	None	21.80	STD	A
B75D31R	JIS	75	150	660	304	173	202	225	None	21.80	STD	B
B786MF	BCI	72	120	760	260	179	185	185	B1	18.60	Side	F
B78DT6MF	BCI	72	120	760	260	179	185	205	B1	18.60	DF	F
B80D26L	JIS	70	130	600	260	174	202	225	B1	17.50	STD	A
B80D26R	JIS	70	130	600	260	174	202	225	B1	17.50	STD	B
B85B60L	JIS	55	84	550	231	174	185	206	B1	15.40	STD	B
B85B60R	JIS	55	84	550	231	174	182	205	B1	15.40	STD	A
B95D31L	JIS	90	160	730	304	173	202	225	None	22.00	STD	A
B95D31LHD	JIS	90	160	730	304	173	202	225	None	22.00	STD	A
B95D31R	JIS	90	160	730	304	173	202	225	None	22.00	STD	B
B95D31RHD	JIS	90	160	730	304	173	202	225	None	22.00	STD	B
BN100	HEAVY DUTY	100	182	740	408	175	211	233	None	25.50	STD	B
BN100L	HEAVY DUTY	100	182	740	408	175	211	233	None	25.50	STD	A
BN120	HEAVY DUTY	120	230	900	505	183	215	240	None	35.00	STD	E
BN120L	HEAVY DUTY	120	230	900	505	183	215	240	None	35.00	STD	D
BN150	HEAVY DUTY	150	300	1000	508	222	216	241	None	39.00	STD	E
BN150L	HEAVY DUTY	150	300	1000	508	222	216	241	None	39.00	STD	D
BN200	HEAVY DUTY	200	430	1200	523	279	224	250	None	55.00	STD	E
BN200L	HEAVY DUTY	200	430	1200	523	279	224	250	None	55.00	STD	D

ABBREVIATIONS

B1	2 bottom hold-downs 10.5mm high on long sides
B3	4 bottom hold-downs 10.5mm high on all four sides
B4	2 bottom hold-downs 19mm high on long sides
B3/B4	B4 BHD available with adaptor on long sides.
BN	Bolt nut terminal
DF	Dual fit terminal
SM	Small terminal
STD	Standard terminal
TM	Twin marine

ASSEMBLY LAYOUT

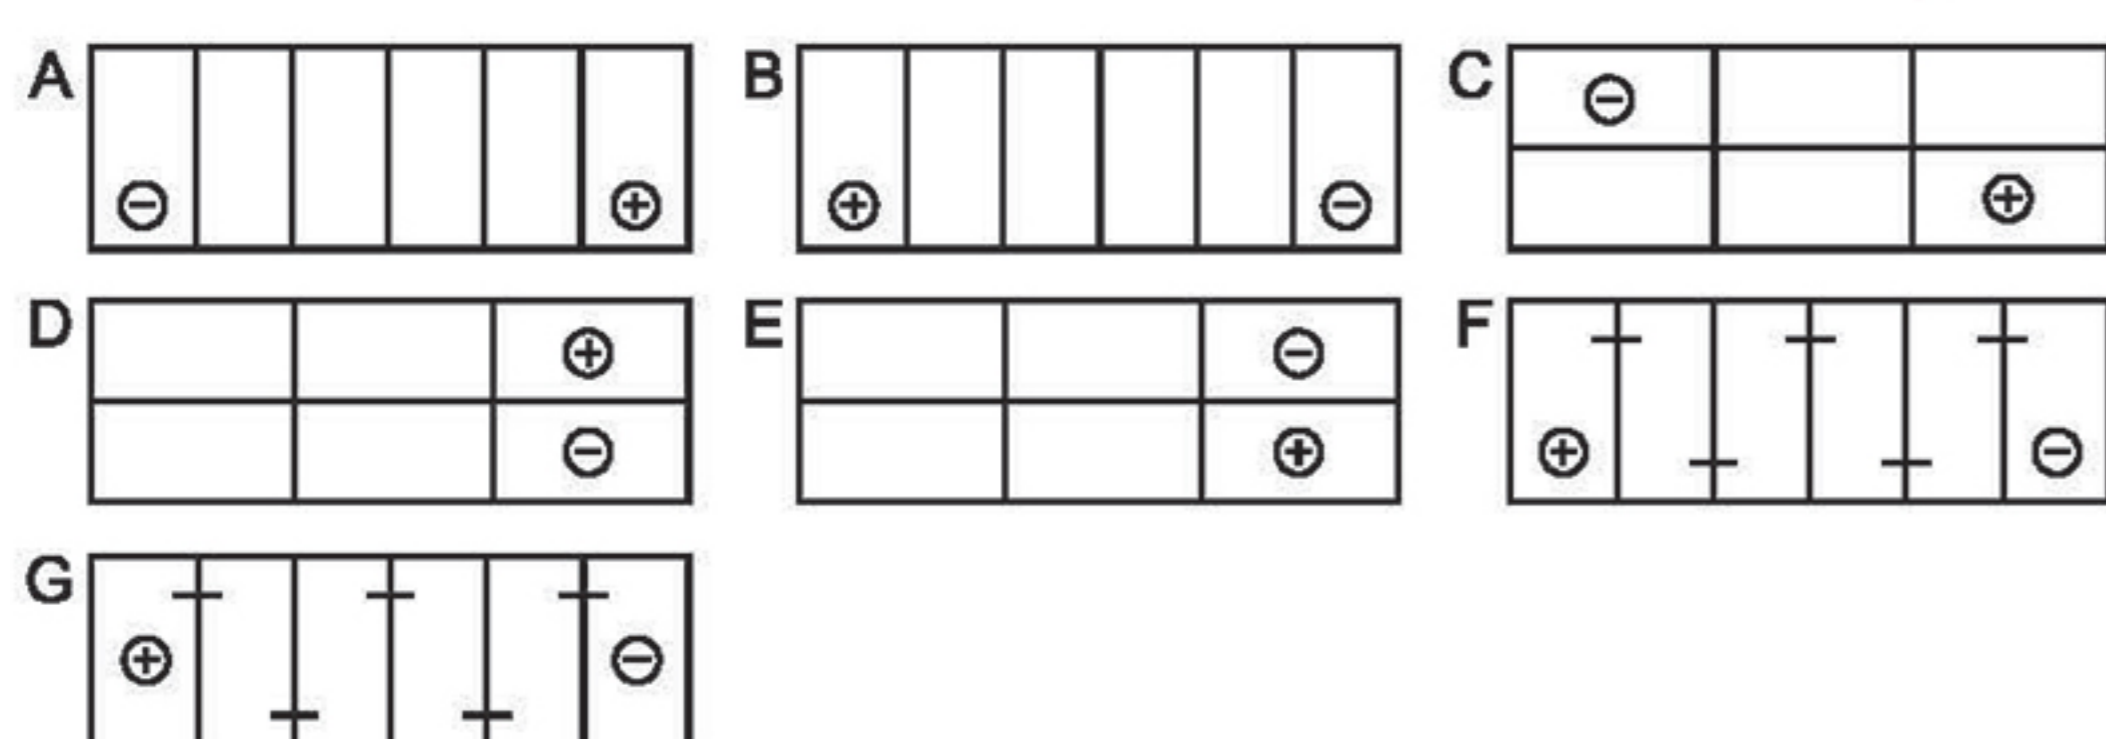

Low Maintenance Battery Application Listing

PART NO	JIS / DIN / BCI	AH / 20 HR	RESERVE CAPACITY (MINUTES @ 27 C)	CCA (@ -18 C)	LENGTH (MM)	WIDTH (MM)	HEIGHT (MM)	BOTTOM HOLD-DOWNS	WEIGHT PER UNIT WITH ACID (KG)	TERMINAL TYPE	ASSEMBLY LAYOUT
12N243BD		26	38	240	186	126	181	None	7.80	BN	A
12N244BD		26	38	240	186	126	181	None	7.80	BN	B
22F54BD	22F Series	48	62	360	240	174	211	None	13.20	DF	A
22F66BD	22F Series	60	78	450	240	174	211	None	14.50	DF	A
22FR54BD	22F Series	48	62	360	240	174	211	None	13.20	STD	B
22FR66BD	22F Series	60	78	450	240	174	211	None	14.50	STD	B
30H102BD		100	180	780	330	173	230	None	25.00	STD	B
30HL102BD		100	180	780	330	173	230	None	25.00	STD	A
50D20RBD		50	80	400	202	173	225	None	13.50	STD	B
50D20LBD		50	80	400	202	173	225	None	13.50	STD	A
55457BD	DIN	54	85	440	245	175	175	B3	14.10	STD	A
55458BD		54	85	440	245	175	175	B3		STD	B
55D23RBD	JIS	60	100	500	232	173	225	None	15.70	STD	B
55D23LBD	JIS	60	100	500	232	173	225	None	15.70	STD	A
56318BD	DIN	63	110	580	280	175	175	B4	16.50	STD	A
56330BD	DIN	63	100	520	280	175	175	B3	16.50	STD	A
56638BD		66	110	580	278	175	190	B3		STD	A
58515BD		85	148	770	353	175	175	B3/B4		STD	A
58827BD	DIN	88	140	700	378	175	190	B3	22.50	STD	A
58828BD		88	140	700	353	175	190	B3		STD	B
60044BD		100	175	850	353	175	190	B3		STD	A
AU2266BD	22F Series	60	78	450	240	174	211	None	14.50	DF	A
AU22R66BD	22F Series	60	78	450	240	174	211	None	14.50	STD	B
AU22R54BD		48	62	360	240	174	211		13.20	STD	B
AU2254BD		48	62	360	240	174	211		13.20	STD	A
N100BD		100	165	680	408	175	223	None	23.50	STD	B
N120BD	HEAVY DUTY	115	215	800	505	183	236	None	33.20	STD	D
N150BD	HEAVY DUTY	143	280	950	508	222	238	None	33.50	STD	D
N200BD	HEAVY DUTY	195	400	1100	525	281	243	None	54.50	STD	D
N3854BD		33	52	300	240	135	208	None	12.80	STD	B
N38L54BD		33	52	300	240	135	208	None	12.80	STD	A
NS40ZLSBD	JIS	35	44	270	197	129	227	None	9.50	STD	A
NS40ZLBD	JIS	35	44	270	197	129	227	None	9.50	SM	A
NS40ZSBD	JIS	35	44	270	197	129	227	None	9.50	STD	B
NS40ZBD	JIS	35	44	270	197	129	227	None	9.50	SM	B
NS60BD		40	65	360	238	129	225	None		SM	B
NS60SBD		40	65	360	238	129	225	None		STD	B
NS60LBD		40	65	360	238	129	225	None		SM	A
NS60LSBD		40	65	360	238	129	225	None		STD	A
NS70LBD	JIS	60	100	500	260	170	225	None	16.50	STD	A
NS70BD	JIS	60	100	500	260	170	225	None	16.50	STD	B
NX1105LBD	JIS	70	115	600	260	170	225	None	18.00	STD	A
NX1105BD	JIS	70	115	600	260	170	225	None	18.00	STD	B
NX1207LBD	JIS	75	120	660	304	172	225	None	21.00	STD	A
NX1207BD	JIS	75	120	660	304	172	225	None	21.00	STD	B

ABBREVIATIONS	
B3	4 bottom hold-downs 10.5mm high on all four sides
B4	2 bottom hold-downs 19mm high on long sides
BN	Bolt nut terminal
DF	Dual fit terminal
SM	Small terminal
STD	Standard terminal

